

AC 400

Cummins
Mecc Alte
D+ &



ISO8528	GC ,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC

&\$\$\$#(#

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	400,00	320,00	360,00	288,00	519,00

fP GDE' ... GC ,) &

fDF DE' ... GC " \$(*

z & (... GC

Standard Specifications

z

fl ! E

z

z

1

ALTERNATOR

TRANSFER SWITCH

AC 400

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		NTA 855 G4		
		%\$\$' "# "		
		')%\$\$' "		
		Q +\$Z\$\$<DQ		
	L	14,000		
	"	140 x 152		
		14,0:1		
	fl # 7	"# "	1500	
	fl 7	L	38,60	
		L	66,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	26,00		
	' # "	453,00		
fl ' # 7	' # "	73,50		
	° C	541,00		
		24 V d.c.		
	Load	%\$\$i	'+) i) \$i
	# "	76,00	57,00	39,00


		Mecc Alte		
		ECO 40-1S		
	Hz	50		
	"	400,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	577,00		

		fl 7		fl 7	
		"	"	"	L
AC 400	3130,00	3183,00	1550,00	2071,00	700,00
		fl 7		fl 7	
		"	"	"	L
MS 70	4200	4460	1606	2477	700

AC 400

Cummins
Mecc Alte
D+' &'

1 D+' &'

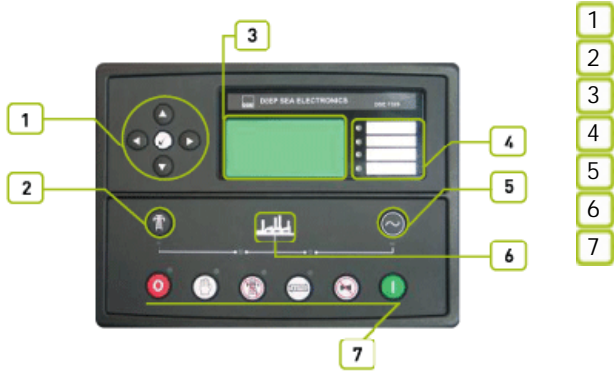

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž
&&\$' ž

8G9+' &\$ž

8G9+' &\$ž

ž

% &1*(

žFG&' &žFG(,) ž

ž

AC 400

Cummins
Mecc Alte
D+ &

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)

ž


ž

ž

ž

AC 400

Cummins
Mecc Alte
D+ &

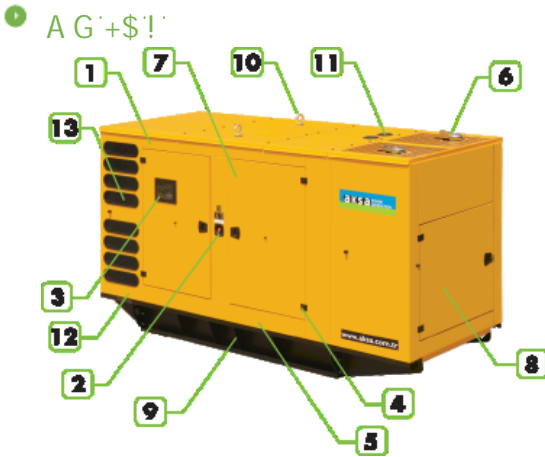

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4460
fl "L	"	2477
	L	700